

SUPERMET™ & SUPERMET™ HB PET

High Metal Adhesion Polyester

The solution to your metal adhesion challenges are solved with **SUPERMET** a high metal adhesion polyester.

For consistent adhesion results when they matter the most.

Select the product(s) most suited to your applications.

1. **SUPERMET™ PET** with **superior metal adhesion, certified** to a minimum of **600 g/in.**

Typical Barrier Values

Moisture barrier - 0.05 g/100in²/24 hr.

Oxygen barrier - 0.07 cc/100in²/24 hr.


2. **SUPERMET™ HB PET** superior **metal adhesion** solution, **certified** to a minimum of **600 g/in** with excellent oxygen and moisture barrier values all in one film.

Typical Barrier Values

Moisture barrier - 0.03 g/100in²/24 hr.

Oxygen barrier - 0.04 cc/100in²/24 hr.

Applications: food packaging where improved metal adhesion and excellent barrier is required.

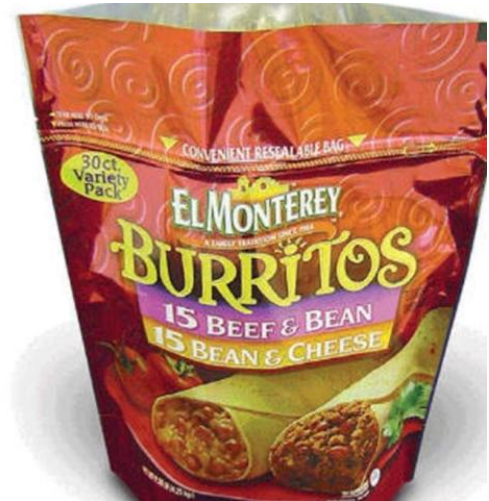

Sales

Jim Lush
Eastern USA and Canada
(416) 644-3506
jim@celplast.com

Veronica Ataya
Midwest USA and Latin America
(416) 644-3512
veronica@celplast.com