

## ZONEMET™ STRIPE METALLIZATION

### INFORMATION REQUIRED

Please provide a drawing with metal and clear stripe dimensions. Please specify unwind direction, metal wind side and stripe width tolerances. Refer to diagrams on page 2 for further information.

### STRIPE CAPABILITIES

Maximum web width: 2032 mm (80")

Minimum clear stripe width: 37 mm (1.45")

Minimum clear stripe to clear stripe distance: 26 mm (1")

### STRIPE TOLERANCES

Minimum Tolerances:

- Clear stripes = +3 mm (0.12"), -2 mm (0.08")
- Metal stripes = +2 mm (0.08"), -3 mm (0.12")
- Tolerance on overall FGI width = +3 mm (0.12"), -2mm (0.08")


### LEAD TIMES

The lead time to order the required tooling materials for each design is 3-4 weeks. Please call 416-293-4330 ext. 228 or email [jmalik@celplast.com](mailto:jmalik@celplast.com) for further assistance.

# STRIPE METALLIZATION


Wind Selection

(A)

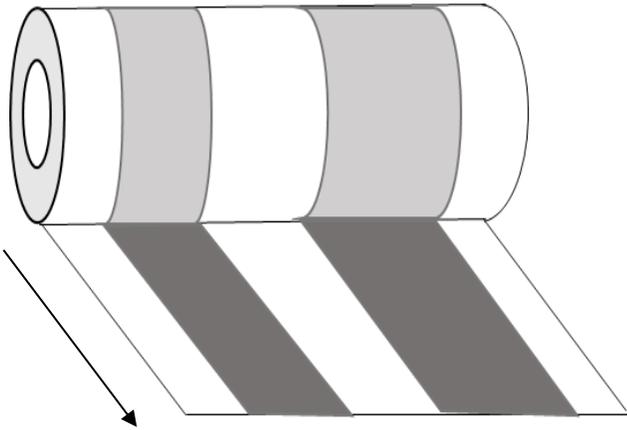


Metal INSIDE  
Unwind from BOTTOM

(B)

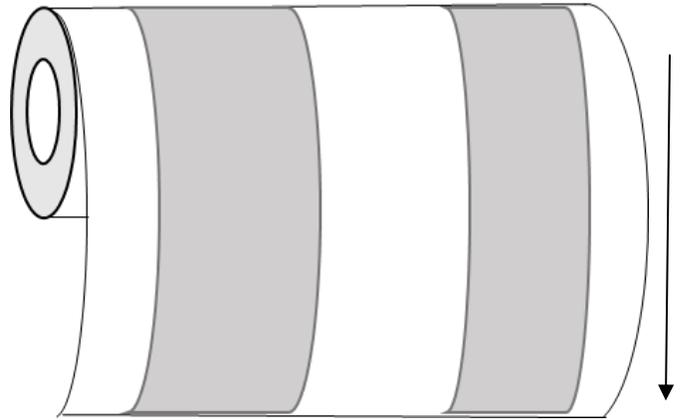


Metal INSIDE  
Unwind from TOP

(C)

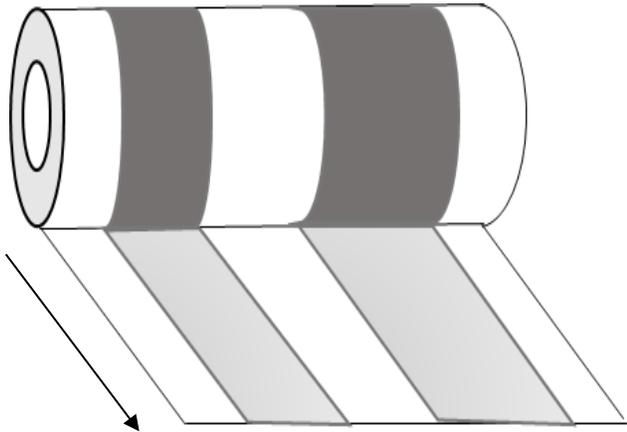

Metal OUTSIDE  
Unwind from BOTTOM

(D)

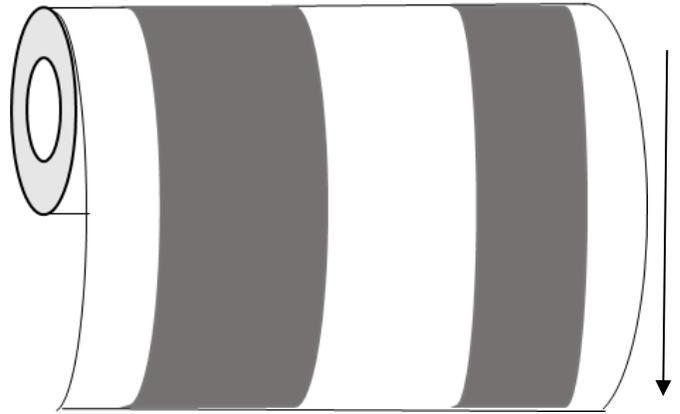

Metal OUTSIDE  
Unwind from TOP