

REFLECT-MET™

Metallized and top-coated polyester film

Top-coated 48 g **REFLECT-MET™** PET

Emissivity compares to that of foil at 0.06.


Corrosion resistance: coating developed exhibits good temperature resistance and meets ASTM D3310 (7 days at 71 C, 100%RH) corrosion protection requirement on metal surface.

Excellent vapor retarder, passes ASTM E96 perm test after 28 day at 49 C, 95%RH (ASTM C1258) at .235 perms.

Bonds well to LLDPE sealant web

Excellent foil-like appearance.

Applications: insulation, including reflective and radiant barrier insulation for buildings.

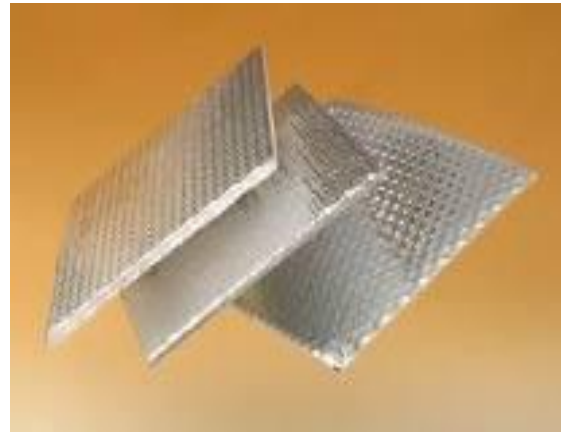

Typical reflective insulation structure: REFLECT-MET/bubble lamination



REFLECT-MET used in outdoor wear

Sales

Jim Lush

Eastern USA and Canada
(416) 644-3506
jim@celplast.com

Nowrin Abedin

Western USA and Texas
(416) 644-3508
nabedin@celplast.com

Veronica Ataya

Midwest USA and Latin America
(416) 644-3512
veronica@celplast.com