



ENVIROMET®

Sustainable Solution: a metallized bi-axially oriented PLA film

Sustainable, corn based bi-axially oriented PLA film.

Biodegradable - passes ASTM D6400 compostability requirement, even with barrier coatings.


Heat sealable to itself.

Good seal strength (destruct bond).


Readily available in North America, with local technical support.

Available in gauges from 80 - 200

Moisture Barrier- Typical value of 0.2 g/100in²/day

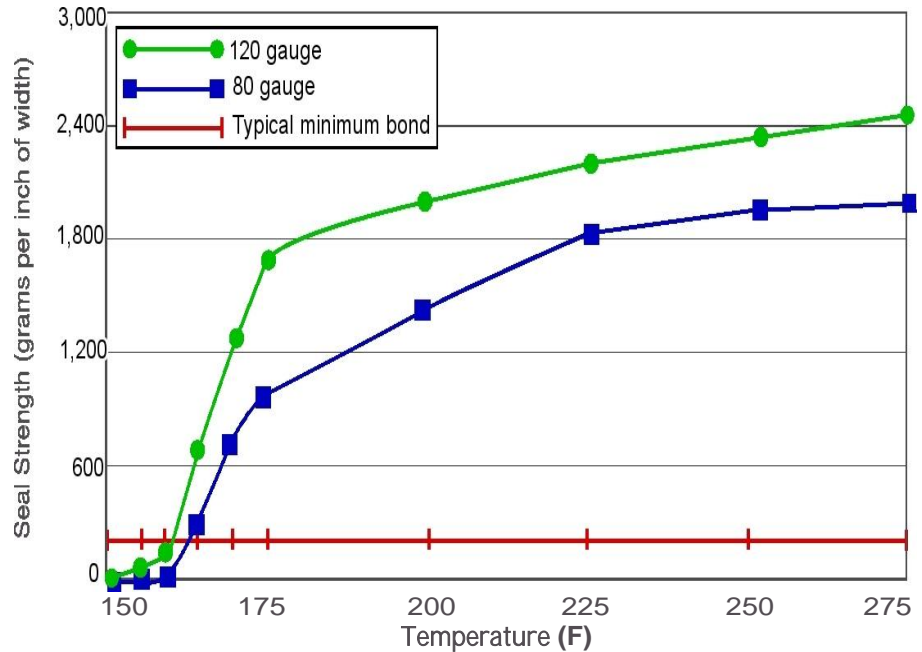

PLA Packaging Film Seal Strength vs. Temperature
20 psi and 0.25 seconds dwell time

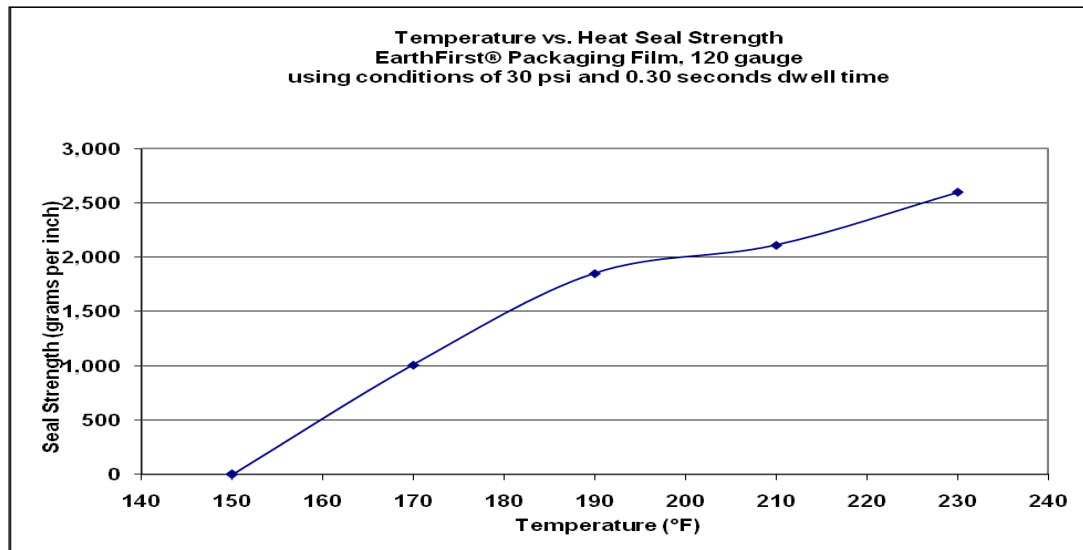

Sales

Jim Lush
Eastern USA and Canada
(416) 644-3506
jim@celplast.com

Veronica Ataya
Midwest USA and Latin America
(416) 644-3512
veronica@celplast.com