

CAMCLEAR® & CAMSHIELD® T

Clear, High Barrier Aluminum Oxide Coated Polyester

Camclear® and **Camshield® T** AlOx coated Polyester

Chlorine-free barrier coating

Environmentally friendly option when compared to PVdC coated polyester

Non-yellowing with excellent clarity and haze values


Increased “shelf appeal”

Printable and suitable for food packaging

High oxygen and moisture barrier values for improved product shelf life

Higher yield and machine efficiencies versus traditional films

Available in 36, 40 & 48 gauge

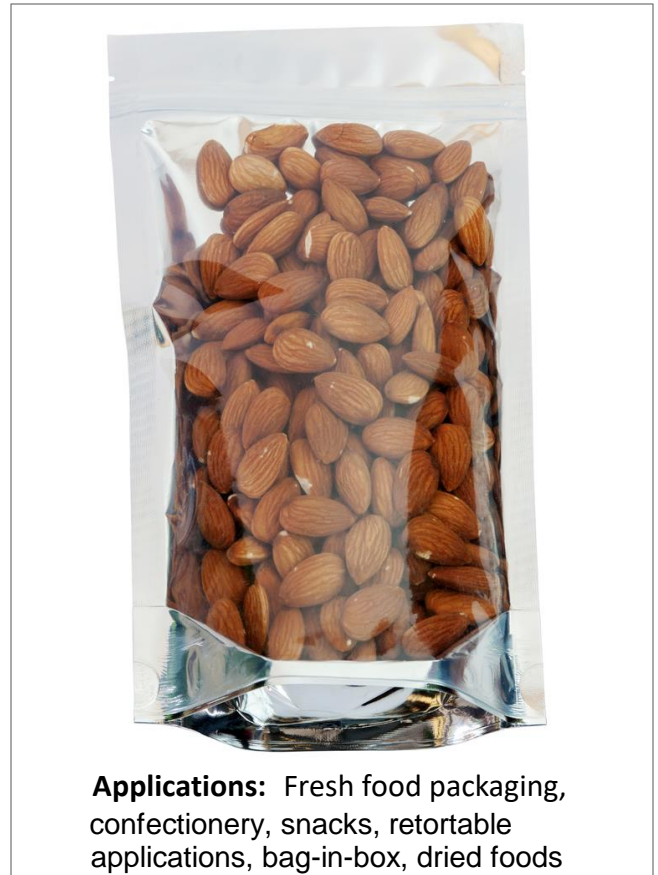

Camclear® AlOx Polyester

Non-retort grade

	36 g	40 g	48 g
OTR cc/100in ² /24 hr.	0.19	0.19	0.19
WVTR g/100in ² /24 hr.	0.15	0.15	0.15

Camshield T Top-Coated AlOx PET

Suitable for retort and layer elimination

	48 g
OTR cc/100in ² /24 hr.	0.096
WVTR g/100in ² /24 hr.	0.065

Sales

Jim Lush
Eastern USA and Canada
(416) 644-3506
jim@celplast.com

Veronica Ataya
Midwest USA and Latin America
(416) 644-3512
veronica@celplast.com