

ENVIROMET[®] PLA

Sustainable Solution: a metallized bi-axially oriented PLA film



Sustainable corn based PLA.

Biodegradable - passes ASTM D6400 compostability requirement.

Printable with 38 natural dyne level.

Heat sealable.


Good Seal strength (destruct bond).

Excellent flavor, aroma and grease barrier.

Responsive technical support.

Gauge availability ranges from 80 – 220.

Moisture Barrier - typical value of 0.2 g/100 in²/day.

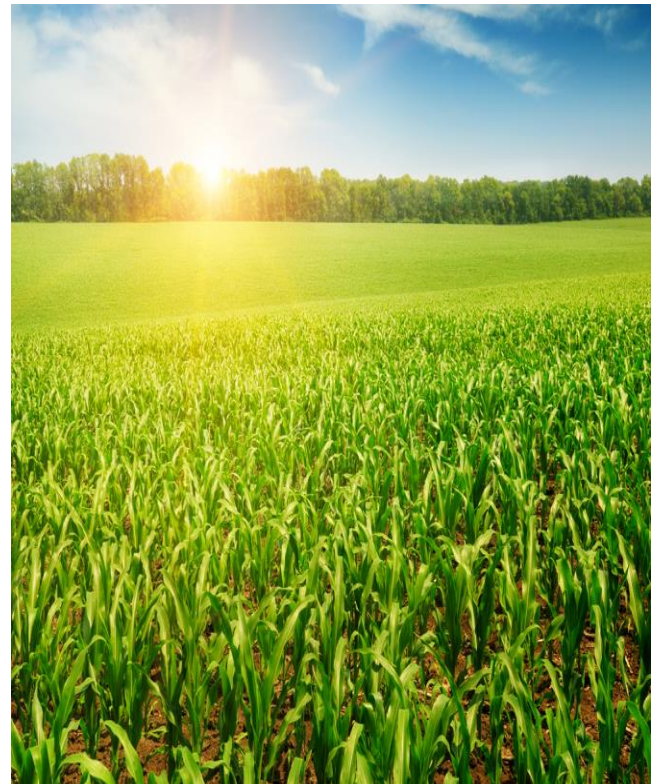

Sales

Jim Lush
Eastern USA and Canada
(416) 644-3506
jim@celplast.com

Veronica Ataya
Midwest USA and Latin America
(416) 644-3512
veronica@celplast.com