


REFLECT-MET® PET + Poly Coating

Poly Coated Low-E Metallized PET

Lamination Ready

Top-coated **REFLECT-MET® PET Facer** film, **Poly Coated** on the non-metallized side.

- ◆ Low Emissivity of 0.05
- ◆ **Corrosion resistance:** < 0.1 emissivity after 7 days aging with test method ASTM D3310 (7 days at 71 C, 100% RH).
- ◆ Coating exhibits good temperature resistance.
- ◆ Excellent vapor retarder.
- ◆ Passes ASTM E96 perm test after 28 days at 49 C 95%RH (ASTM C1258) at .235 perms.
- ◆ Destruct bonds of the poly coating to the polyester surface.
- ◆ Bright foil-like appearance.

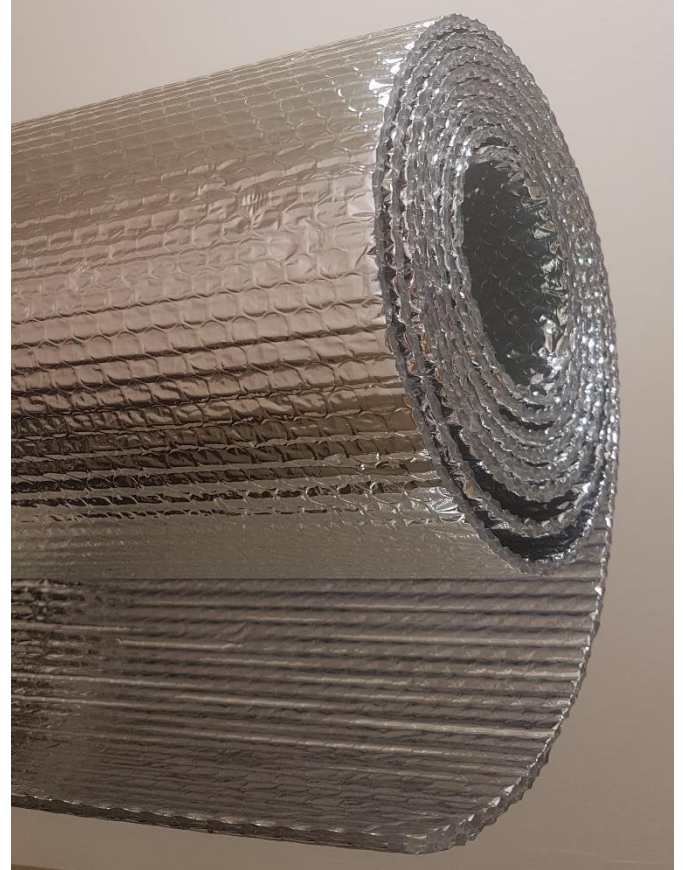

Applications: for building insulation applications and other protective insulation applications.

The Barrier People