

STRIPE METALLIZATION

INFORMATION REQUIRED

Provide a drawing with dimensions and FGI roll profile. Specify unwind direction, metal side and tolerances.

STRIPE CAPABILITIES

Maximum web width: 1.270mm

Minimum clear stripe width: 25mm

Minimum clear stripe to clear stripe distance: 38,1mm

STRIPE TOLERANCES

Minimum Tolerances:

- Clear stripes = +3 mm, -2 mm
- Metal stripes = +2 mm, -3 mm
- Tolerance on overall FGI width = +3mm, -2mm

LEAD TIMES

The lead time to order the required tooling materials for each design is 3-4 weeks. Please call 416-644-3512 or email veronica@celplast.com for further assistance.




celplast
metallized products

Celplast Metallized Products Limited
67 Commander Blvd, Unit 4
Toronto, Ontario, M1S 3M7
O 416-293-4330 F 416-293-9198
www.celplast.com

STRIPE METALLIZATION

Top Unwind

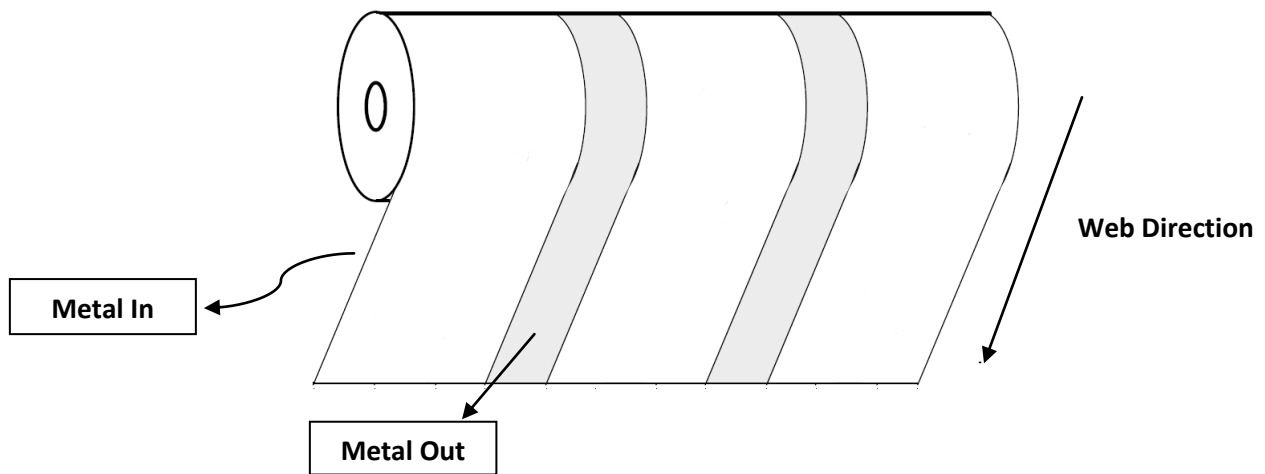

Bottom Unwind

